


Q-6068



3 Years Warranty

## Q-6068 MORTISE LOCK

The Q-6068 Double Finger Press Panic/Emergency Door Release (EDR) was developed to address the critical need for reliable and intentional emergency activation in high-security environments. Its double-action press mechanism minimizes accidental activations, enhancing safety while preventing false alarms.

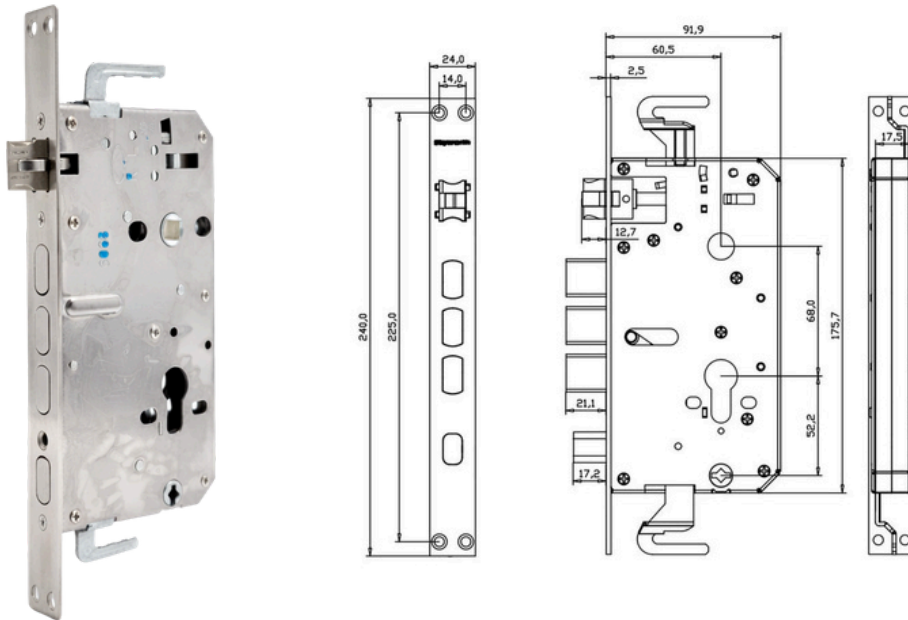

### PRODUCT DESCRIPTION

The Q-6068 is a durable lock compatible with 4–12 cm wooden and metal doors. Featuring a sleek 24 mm x 240 mm panel, 90 mm thickness, and locking distances of 60 mm and 68 mm, it combines style with functionality. Made from 304 stainless steel and alloy steel, it offers corrosion resistance and long-lasting performance. Its reversible design supports left or right-hand doors, with a handle that unlocks oblique and square tongues simultaneously. Additional features include an anti-lock knob, safety tongue mechanism, and top-bottom hook linkage for extra security. The Q-6068 is a reliable and versatile solution for any setting.

### PRODUCT ADVANTAGES

- Wide Compatibility:** Fits 4–12 cm wooden and metal doors for versatile use.
- Durable Build:** Premium 304 stainless steel ensures strength and corrosion resistance.
- Reversible Design:** Works with left or right-hand doors for flexible installation.
- Enhanced Security:** Safety tongue mechanism and anti-lock knob provide extra protection.
- Easy Operation:** Handle unlocks oblique and square tongues simultaneously.
- Stylish and Compact:** Sleek design with a sturdy 90 mm thickness for modern settings.
- Stable Locking:** Includes top-bottom hook linkage for added reliability.

Q-6068



3 Years Warranty

## TECHNICAL SPECIFICATION

Product Parameter	Description Parameter
Model	Q-6068
Lock Core Length	Supports doors up to 12 cm thick
Suitable Door Thickness	Compatible with doors ranging from 4 cm to 12 cm.
Panel Dimensions	24 mm wide and 240 mm
Locking Distances	<ul style="list-style-type: none"> <li>60 mm: From the door edge to the center of the lock body.</li> <li>68 mm: From the center of the lock body to the lock core.</li> </ul>
Overall Thickness	90 mm
Additional Dimensions	<ul style="list-style-type: none"> <li>Anti-Lock Knob Distance: 52 mm.</li> <li>Square Core Hole: 8 x 8 mm dimensions.</li> </ul>
Overall Thickness	90 mm
Material Composition	<ul style="list-style-type: none"> <li><b>Oblique Tongue:</b> Precision-cast 304 stainless steel or alloy steel.</li> <li><b>Main Tongue:</b> 304 stainless steel or alloy steel.</li> <li><b>Liner:</b> Made from 304 stainless steel for added durability.</li> <li><b>Lock Body Shell:</b> 430 stainless steel or electrolytic plate for corrosion resistance.</li> </ul>
Warranty	3 Years
Country of Origin	Malaysia
Certifications	UL, CE

## FUNCTIONAL FEATURES

**Handle Mechanism:** Allows seamless unlocking of the oblique and square tongues by pressing the handle.

**Reversible Design:** Supports both left-hand and right-hand door installations with a free-reversing oblique tongue.

**Independent Safety Tongue:** Enhances security with an isolated safety mechanism.

**Linkage Mechanism:** Includes top and bottom hooks for improved stability and locking performance.

## APPLICATIONS

Designed for both wooden and metal doors, providing versatility across a range of environments.

