

Q-GLC-T

10/100/1000BASE-T SFP COPPER RJ-45 100M TRANSCEIVER



Form Factor	Fiber Type	Connector	Max Reach
SFP	Copper (Cat5e/Cat6 UTP)	RJ-45	100 m

OVERVIEW

The Quant Q-GLC-T is a hot-pluggable copper SFP transceiver designed for Gigabit Ethernet applications over twisted-pair copper cables. It supports 10/100/1000BASE-T operation and enables connectivity up to 100 meters over Cat5e or Cat6 UTP cabling. The module complies with the SFP Multi-Source Agreement (MSA) and IEEE 802.3 / 802.3ab standards.

Key Features	Typical Applications
<ul style="list-style-type: none"> Hot-pluggable SFP form factor Supports 10/100/1000BASE-T Ethernet RJ-45 copper interface Transmission distance up to 100 m over Cat5e/Cat6 UTP Fully metallic enclosure for low EMI Compact RJ-45 connector assembly Single 3.3 V power supply Access to PHY via 2-wire serial interface Compliant with SFP MSA and IEEE 802.3 / 802.3ab 	<ul style="list-style-type: none"> Gigabit Ethernet networks Router / server interface Switch-to-switch connections LAN 10/100/1000BASE-T links Copper uplink for enterprise networks

Q-GLC-T

10/100/1000BASE-T SFP COPPER RJ-45 100M TRANSCEIVER



TECHNICAL SPECIFICATIONS


Parameter	Specification
Part Number	Q-GLC-T
Description	10/100/1000BASE-T copper SFP transceiver
Form Factor	SFP, hot-pluggable
Data Rate	10 / 100 / 1000 Mbps
Cable Type	Cat5e / Cat6 UTP
Connector	RJ-45
Maximum Reach	100 m
Standards Compliance	IEEE 802.3, IEEE 802.3ab
Electrical Interface	SGMII
Supply Voltage	Single +3.3 V
Supply Current	≤350 mA
Operating Temperature	0°C to +70°C
Storage Temperature	-40°C to +85°C
Warranty	2 years
Origin of Country	Vietnam

Q-GLC-T

10/100/1000BASE-T SFP COPPER RJ-45 100M TRANSCEIVER



PRODUCT DIMENSION

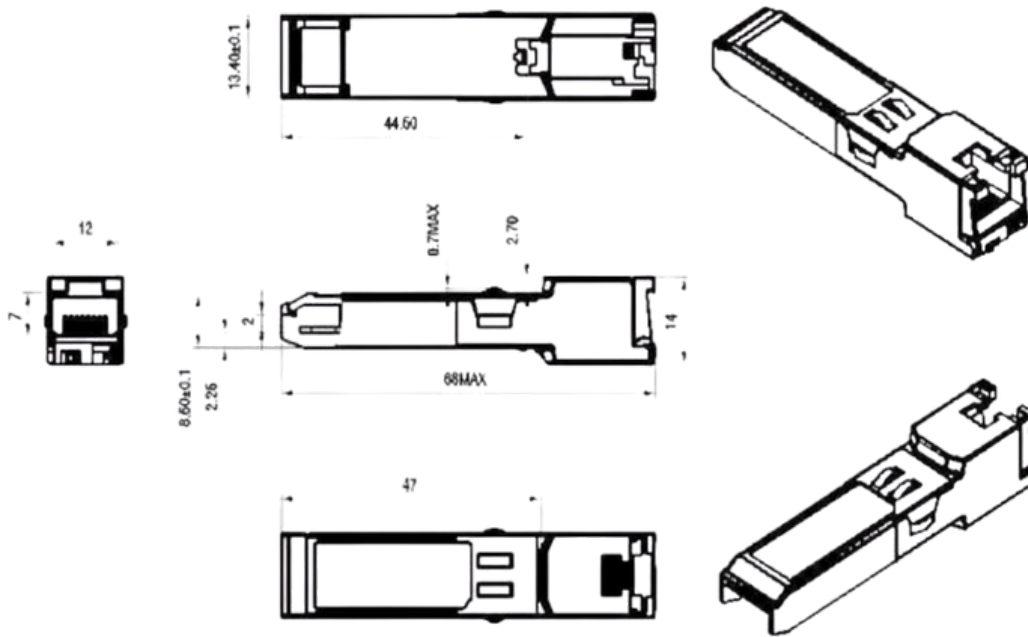

ORDERING INFORMATION

Q-GLC-T

10/100/1000BASE-T copper SFP transceiver, RJ-45 connector, 100 m over Cat5e/Cat6 UTP, commercial temperature (0~70°C).

